TECHNICAL DATA SHEET

HYOSUNG Polypropylene
The Next Circular Economy

R530A

Random Copolymer
For IV Bottles

Product Description

HYOSUNG Polypropylene R530A is specially designed polypropylene random copolymer that features excellent biocompatibility. **PP R530A** is suitable for pharmaceutical usage such as intravenous (IV) bottles, cosmetic and food contact products. This product complies with European Pharmacopeia(EP) § 3.1.6 and United State Pharmacopeia (USP) class VI. Also, this product is registered on US FDA Drug Master File list (DMF No. 21499).

Application

IV Bottles (EBM)
Cosmetic and food container

Features

Biocompatibility (EP § 3.1.6 and USP Class VI)
DMF No. 21499 listed
Phthalate free

Properties

Properties	Test Method	Typical Value	Unit
Resin Properties			
Melt Index(230℃, 2.16kg)	ASTM D1238	2.0	g/10min
Density	ASTM D792	0.90	g/cm^3
Mechanical Properties			
Tensile Strength at Yield	ASTM D638	290	kg/cm^2
Flexural Modulus	ASTM D790	9,000	kg/cm^2
Izod Impact Strength, Notched at 23℃	ASTM D256	8.0	kg·cm/cm
Rockwell Hardness	ASTM D785	85	R-Scale
Heat Deflection Temperature (0.45MPa)	ASTM D648	95	℃
VICAT Softening Temperature (10N)	ASTM D1525	130	℃

* The values listed above are typical values for reference purpose only and shall not be construed as specifications.

Storage and Handling

This product should be stored in dry condition at temperature below 40˚C and protected from UV-light. When condensation is visible or can be expected, pre-drying is recommended. (Drying condition: 80~100℃ / 2~4hours at air circulated condition)

Disclaimer

All information, including product characteristics, applications and properties are for reference purpose only and shall not be construed as specifications. Before using this product, customers should carefully review the instructions for use of the product to determine whether the product is suitable for the customer's particular purpose. The customer is responsible for the appropriate, safe and legal use, processing and handling of this product. HYOSUNG CHEMICAL CORPORATION assumes no legal responsibility or liability for the contents of this document. We reserve the right to change the contents of this document without prior notice. This document is copyrighted by HYOSUNG CHEMICAL CORPORATION.

Contacts

Head Office (06578) 235, Banpo-daero, Seocho-gu, Seoul, KR
Tel: +82-2-2146-5439
Online www.hyosungchemical.com

HYOSUNG CHEMICAL


TECHNICAL DATA SHEET

HYOSUNG Polypropylene
The Next Circular Economy

R530A

Random Copolymer
For IV Bottles

Processing Parameters

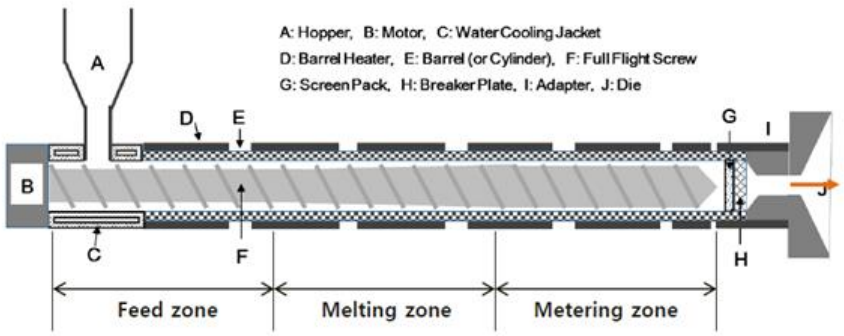

Specifications	Unit	Recommended Parameters
Feed Zone Temperature	℃	160 ~ 180
Melting Zone Temperature	℃	180 ~ 225
Metering Zone Temperature	℃	180 ~ 250
Die or Nozzle Temperature	℃	180 ~ 250
Mold Temperature (for EBM)	℃	180 ~ 220
Screw Speed	rpm	15 ~ 50
Blowing Pressure (for EBM)	psi	90

Considerations
Due to variations in screw design and heat efficiency according to types of facilities, optimal conditions for each facility may differ. Therefore, the optimal temperature conditions for each facility must be taken into consideration depending on thickness of intermediate or final products, extruding pressure, cooling efficiency, changes in MI of the final product, appearances of the final product, and others.

Health, Safety and Food Contact Regulations

PP R530A complies with FDA requirements in the code of Federal Regulations in 21 CFR 177. 1520 for food contact and European Commission Regulation (EU) No 10/2011 and its amendments up to (EU) No 2023/1627 with regard to plastic materials and articles intended to come into contact with food.

Contacts

Head Office (06578) 235, Banpo-daero, Seocho-gu, Seoul, KR
Tel: +82-2-2146-5439
Online www.hyosungchemical.com

HYOSUNG CHEMICAL